




relinea®

Re-Grid Mini Mesh Grating

Re-Grid Mini Mesh Grating

Relinea’s Mini Re-Grid GRP grating is designed to provide safe, robust open mesh flooring access for pedestrians and is ideal for use in marinas and in applications where small wheeled trolleys are used. With a smaller aperture than our standard Re-Grid, many of our Mini Re-Grid products comply with BS EN 14122 Category B and the European 15 mm ball test.

Relinea’s unique ‘Embedded Grit Technology’ ensures our grating products offer exceptional long lasting anti-slip properties in all conditions and have been classified as a very low slip risk to BS4592. Mini Re-Grid is a 1/3rd of the weight of equivalent steel grating and can be easily fabricated making it very easily installed. Also due to the bi-directional strength the grating does not have to be end-banded, eliminating the need for additional supports around pipework.

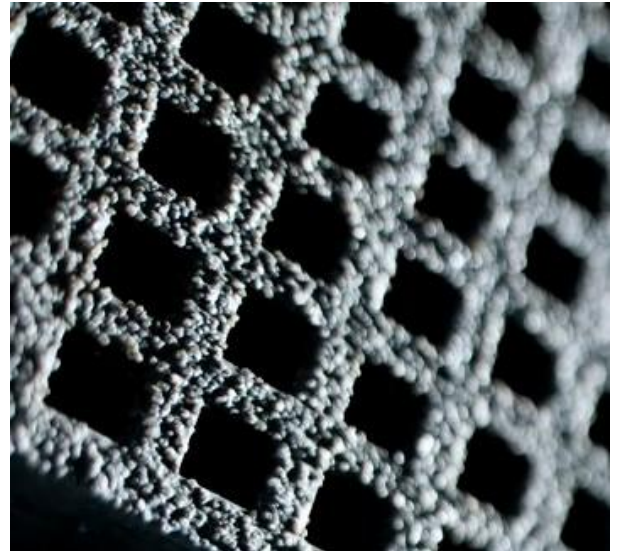

Our product solutions are manufactured to the highest specification and use high quality raw materials which ensures our products can be used in some of the most aggressive and challenging environments.

With a 50+ year design life this is an eco friendly and sustainable choice.


Type	Depth (mm)	Mesh size base (mm)	Standard panel size (mm)	Open Area %	Approx Weight (kg/m ²)	Standard Surface	Standard Colours
Mini Re-Grid 3819	38	19 x 19	4002 x 998	42	21	Grit	Light Grey
Mini Re-Grid 3825	38	25 x 25	3000 x 1000	43	21.5	Grit	Light Grey

Other mesh sizes, colours and finishes are available upon request. Please note that if a grit finish is required please add approximately 2mm to the

Grating Details


Dimensional Drawings

Mini Re-Grid 3819

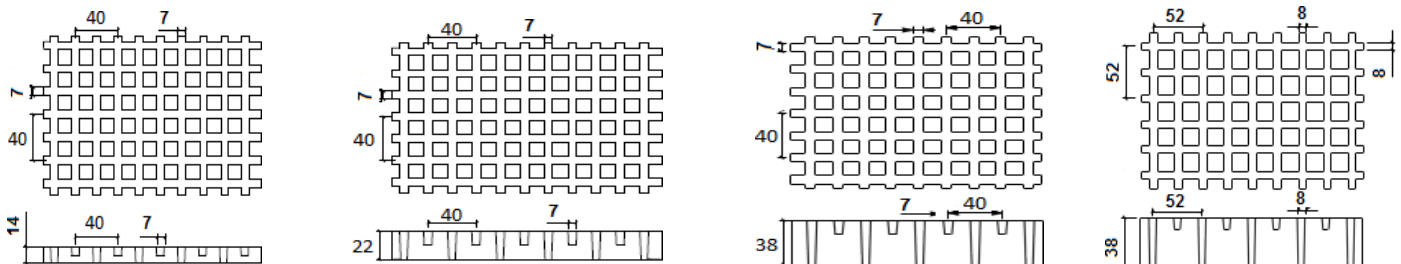

Re-Grid Mini Mesh Load Table - Uniform


Deflections in mm

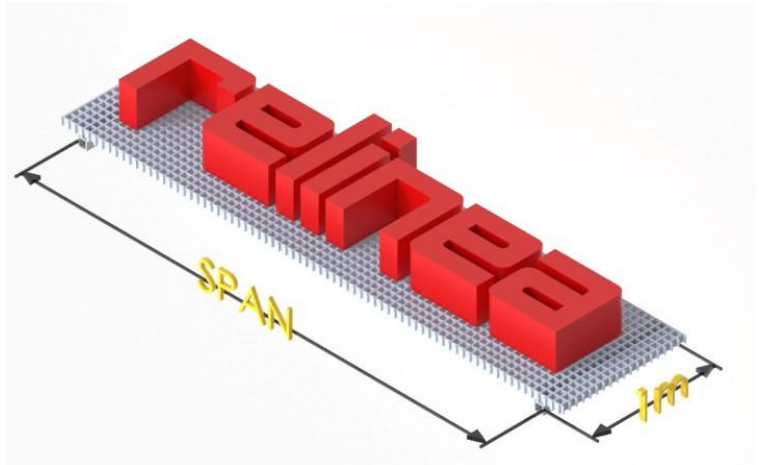

38mm deep 19mm mini mesh							
Loading							
Span		119kg	237kg	361kg	500kg	712kg	950kg
	400mm	0.04	0.08	0.13	0.18	0.25	0.34
	600mm	0.19	0.38	0.59	0.81	1.15	1.54
	750mm	0.46	0.91	1.38	1.91	2.73	3.64
	900mm	0.93	1.85	2.81	3.90	5.55	7.40
	1000mm	1.40	2.79	4.25	5.89	8.39	
	1200mm	2.88	5.73	8.73			
38mm deep 25mm mini mesh							
Loading							
Span		119kg	237kg	361kg	500kg	712kg	950kg
	400mm	0.05	0.10	0.16	0.22	0.31	0.41
	600mm	0.23	0.46	0.71	0.98	1.40	1.86
	750mm	0.55	1.10	1.67	2.32	3.30	4.40
	900mm	1.12	2.23	3.40	4.71	6.71	8.95
	1000mm	1.70	3.38	5.14	7.12		
	1200mm	3.48	6.93	10.55			

Re-Grid Mini Mesh - Concentrated Line Load Table


Deflections in mm

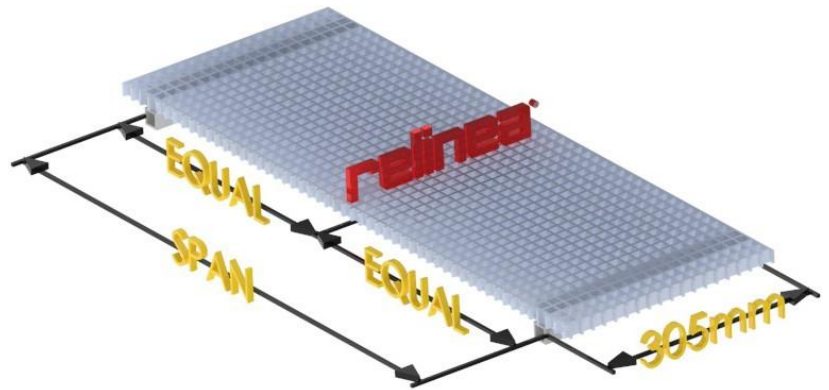

38mm deep 19mm mini mesh							
Loading							
Span		24kg	36kg	47kg	95kg	142kg	191kg
	400mm	0.03	0.05	0.07	0.14	0.20	0.27
	600mm	0.10	0.16	0.20	0.41	0.61	0.83
	750mm	0.20	0.29	0.38	0.78	1.16	1.56
	900mm	0.33	0.50	0.65	1.32	1.97	2.65
	1000mm	0.45	0.68	0.89	1.79	2.68	3.60
	1200mm	0.77	1.16	1.51	3.06	4.58	6.16
38mm deep 25mm mini mesh							
Loading							
Span		24kg	36kg	47kg	95kg	142kg	191kg
	400mm	0.04	0.06	0.08	0.16	0.25	0.33
	600mm	0.13	0.19	0.25	0.50	0.74	1.00
	750mm	0.24	0.36	0.46	0.94	1.40	1.89
	900mm	0.40	0.60	0.79	1.59	2.38	3.20
	1000mm	0.55	0.82	1.07	2.17	3.24	4.35
	1200mm	0.94	1.40	1.83	3.70	5.53	7.44

Re-Grid Mini Mesh - Concentrated Point Load Table

Deflections in mm

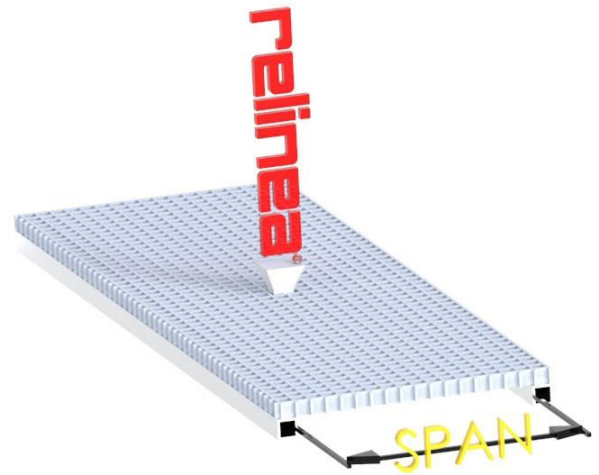

Span	Type	Mesh (mm)	Depth (mm)	Point Load (kN)									
				0.98	1.47	1.96	2.45	2.95	3.93	5.89	7.85	9.81	
450	Mini 2519	19 x 19	25.4	1.28	1.90	2.52	3.08	3.64	4.45	5.56	6.95	8.69	
	Mini 3819	19 x 19	38.1	<0.5	0.60	0.77	0.95	1.14	1.45	2.11	2.77	3.81	
	Mini 5025	25.4 x 25.5	50.8	<0.5	<0.5	<0.5	<0.5	0.68	0.92	1.38	1.84	2.20	
600	Mini 2519	19 x 19	25.4	2.29	3.52	4.71	5.96	7.46	-	-	-	-	
	Mini 3819	19 x 19	38.1	0.66	0.90	1.15	1.42	1.69	2.18	3.17	4.16	5.55	
	Mini 5025	25.4 x 25.4	50.8	<0.5	0.53	0.72	0.86	1.03	1.37	2.07	2.76	3.30	
750	Mini 2519	19 x 19	25.4	3.39	5.21	7.09	8.86	-	-	-	-	-	
	Mini 3819	19 x 19	38.1	1.04	1.47	1.92	2.33	2.77	3.64	5.35	6.20	7.75	
	Mini 5025	25.4 x 25.4	50.8	0.66	0.80	1.08	1.29	1.54	2.06	3.11	4.14	4.95	
900	Mini 2519	19 x 19	25.4	4.96	7.95	14.41	-	-	-	-	-	-	
	Mini 3819	19 x 19	38.1	1.54	2.22	2.92	3.69	4.34	4.94	5.65	8.32	-	
	Mini 5025	25.4 x 25.4	50.8	1.01	1.23	1.59	2.00	2.39	3.14	4.48	6.48	7.60	
1050	Mini 2519	19 x 19	25.4	7.12	-	-	-	-	-	-	-	-	
	Mini 3819	19 x 19	38.1	2.28	3.21	4.25	5.21	6.18	8.15	10.19	-	-	
	Mini 5025	25.4 x 25.4	50.8	1.37	1.81	2.40	3.08	3.66	4.85	7.22	9.55	-	
1200	Mini 3819	19 x 19	38.1	2.95	4.37	5.68	7.18	8.58	11.44	-	-	-	
	Mini 5025	25.4 x 25.4	50.8	2.21	2.62	3.45	4.30	5.16	6.86	10.19	-	-	
1350	Mini 3819	19 x 19	38.1	3.81	5.58	9.4	-	-	-	-	-	-	
	Mini 5025	25.4 x 25.4	50.8	3.34	3.82	4.78	6.54	7.25	9.31	-	-	-	
1500	Mini 5025	25.4 x 25.4	50.8	3.74	4.45	5.87	7.44	8.84	11.72	-	-	-	

Manufacturing Methodology

Moulded grating is manufactured in an open, heated mold that resembles a large waffle iron. Continuous glass fibres are placed in the mold in alternating layers and thoroughly wetted out with resin. This continuous process produces an integral, one-piece construction, which offers bi-directional strength.

The high percentage of resin at 65% ensures Relinea’s GRP moulded grating offer superior chemical resistance and exceptional impact resistance.

Our standard gratings are made with Isophthalic, Class 1 Fire Rated to BS476 part 7 and come with Relinea’s unique embedded integral grit finish that will not chip or peel away. Post manufacture all panels are visually inspected and checked against specification for weight, dimension and flatness. 10% of panels are load tested to ensure compliance with specification.

Relinea can supply all our gratings in a range of resin system to suit any chemical environment. Please see our chemical resistance chart for moulded products.

Typical material properties

Property	Fibreglass	Resin	Re-Grid
Tensile strength (MPa)	201	69	240
Tensile modulus (GPa)	3.5	17	
Flexural strength (GPa)	182	107	240
Compressive strength (MPa)	19	146	200
Inter Laminar Shear	9	-	
Barcol Hardness	45	38	50
Water Absorption (% max.)	2100	1200	0.57
Density (kg/m ³)	2100	1200	1700
Coefficient of thermal expansion 10-6/°C			4
Flammability	BS476 Part 7		Class 1
Flammability extinguishing	ASTM D635	CoF	Self Extinguishing
Anti-slip	BS4592-0:2006		Dry - 0.9 Wet - 0.72

Slip Testing and Fixings

Slip Testing




Relinea’s products have been slip tested by the Highway Engineering Research Ground at the University of Ulster and were assessed for their dry and wet slip resistance properties using a pendulum test as specified in BS7976-2.

The results are shown in the table below:

Sample Ref	Slip resistance value using TRL rubber		Slip resistance value using 4S rubber	
	Dry	Wet	Dry	Wet
Medium Grit	90	72	75	67

As per BS 4592-0:2006 ‘Industrial type flooring and stair treads’ the Coefficient of Friction (CoF) would be 0.72 in wet conditions which could be classified as ‘enhanced slip resistance’

Fixings

Clip	Application	Image
Stainless steel 316 M clip with M8 x 25/50 bolt, nut and washer.	<ul style="list-style-type: none"> * When the beams can be drilled. * Requires access to underneath panel. 	
Stainless steel 316 M clip with M8 x 25/50 bolt, nut and washer includes a base clamp.	<ul style="list-style-type: none"> * When the beams can not be drilled. * Requires access to underneath panel. 	
Stainless steel 316 C Clip with M8 x 30/50 bolt, nut and washer.	<ul style="list-style-type: none"> * Used to join two panels together. 	

Material Safety Data Sheet

Section 1

Product & Company

Identification

Emergency phone number	+44 (0) 28 9447 0010
Product	Re-Grid in standard Polyester, Isophthalic and Vinyl ester fire retardant resin
PPE	Refer to MSDS section 8, control measures

Section 2

Chemical ingredients

Chemical Component	Percentage
Glass reinforced plastic	N/A
Polymerized resin	50 - 55
Fibreglass strand	35 - 55
Silica sand	10 - 15

Section 3

Physical & Chemical Properties

Property	Measurement
Boiling point	N/A
Vapour pressure	N/A
Vapour density	N/A
Melting point	N/A
Evaporation rate	N/A
Solubility in water	None
Appearance and odour	Various coloured meshes and solid shapes. Low to no odour

Section 4

Fire and Explosion Data

Flash Point	N/A
Flammable limits	N/A
Extinguishing media	Water, foam type A, B or C extinguishers

Special firefighting procedures

Use Self-Contained Breathing Apparatus (SCBA) with full face operated in pressure mode.

Unusual fire & explosion hazards	Burning FRP creates a complex mixture of solid, liquid, particulate and gases. Carbon monoxide and other organic compounds may be given off.
LEL	N/A
UEL	N/A

Section 5
Reactivity Data

Stability	Stable
Conditions to avoid	Sources of ignition, sparks or flames, extremely high temperatures.
Incompatibility	Strong oxidising acid.
Hazardous decomposition or by products	N/A
Hazardous polymerization	Will not occur.

Section 6
Health Hazard Data

Routes to entry	Inhalation - X skin - X ingestion - X
Health Hazards	Dust from cutting may act as a mechanical irritant to skin, eyes and upper respiratory system. Vapours or products of thermal degradation generated by cutting or grinding may aggravate or cause respiratory conditions.
Carcinogenicity	NTP - N/A IARC monographs - N/A OSHA - N/A
Signs & Symptoms of exposure	Temporary irritation and itching to skin or eyes. Scratchiness or burning of the nose and/or throat if exposed to large amounts of airborne dust from cutting or machining.
Medical conditions generally aggravated by exposure	Chronic dermatitis or respiratory conditions.
Emergency and first aid procedures	Wash skin well without rubbing. For eyes, use a sterile solution and flood the eye area. Change clothing after exposure. Apply antiseptic to any abraded skin area.

Section 7
Spill or Leak Procedures

Steps to be taken in case material is released or spilled	No material is released in the products solid form. However, when cutting, grinding or machining, if airborne dust is generated, the wearing of respirators is recommended. Control and collect any dust. Place in sturdy containers for proper disposal.
---	---

